

FILE COPY

2

AD-A222 392

ITIC
DOCUMENTATION PAGE
LECTE
Y.23.1990

Form Approved
OMB No. 0704-0188

2a SECURITY CLASSIFICATION AUTHORITY			1b RESTRICTIVE MARKINGS		
2b DECLASSIFICATION/DOWNGRADING SCHEDULE			3 DISTRIBUTION/AVAILABILITY OF REPORT This document has been approved for public release and sale; its distribution is unlimited.		
4 PERFORMING ORGANIZATION REPORT NUMBER(S) IBM Research Report RJ7595			5. MONITORING ORGANIZATION REPORT NUMBER(S) Technical Report #24		
6a NAME OF PERFORMING ORGANIZATION IBM Research Division Almaden Research Center	6b OFFICE SYMBOL (If applicable)	7a. NAME OF MONITORING ORGANIZATION Office of Naval Research			
6c. ADDRESS (City, State, and ZIP Code) 650 Harry Road San Jose, CA 95120-6099		7b. ADDRESS (City, State, and ZIP Code) Chemistry Division Code 1113 Arlington, VA 22217			
8a NAME OF FUNDING/SPONSORING ORGANIZATION Office of Naval Research	8b OFFICE SYMBOL (If applicable)	9 PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER N00014-84-C-0708, 4131022			
8c. ADDRESS (City, State, and ZIP Code) Chemistry Division, Code 1113 Arlington, VA 22217		10 SOURCE OF FUNDING NUMBERS			
		PROGRAM ELEMENT NO	PROJECT NO	TASK NO	WORK UNIT ACCESSION NO
11 TITLE (Include Security Classification) Intracavity Frequency Doubling of a Nd:YAG Laser with an Organic Nonlinear Optical Crystal					
12 PERSONAL AUTHOR(S) Stephen Ducharme, W.P. Risk, W.E. Moerner, Victor Y. Lee, R.J. Twieg, and G.C. Bjorklund					
13a TYPE OF REPORT interim technical	13b TIME COVERED FROM TO	14 DATE OF REPORT (Year, Month, Day) 1990, March, 13		15 PAGE COUNT 14	
16 SUPPLEMENTARY NOTATION Submitted for publication in Applied Physics Letters					
17 COSATI CODES			18 SUBJECT TERMS (Continue on reverse if necessary and identify by block number)		
FIELD	GROUP	SUB-GROUP	nonlinear organic crystals, intracavity, second harmonic generation, 025		
19 ABSTRACT (Continue on reverse if necessary and identify by block number) We have demonstrated intracavity second harmonic generation of green 532 nm light in a quasi-cw 1064 nm Nd:YAG laser using organic nonlinear optical crystals of DAN (4-(N,N-dimethylamino)-3-acetamidonitrobenzene) immersed in index matching fluid contained in an antireflection-coated cuvette. This technique permits crystals to be used directly from solution growth without polishing or antireflection coating them. Up to 0.56 mW peak power of 532 nm light was generated from 2.3 W of intracavity 1064 nm peak power in 100 microsecond pulses. We also report preliminary results on true cw intracavity harmonic generation with antireflection coated DAN crystals.					
20 DISTRIBUTION/AVAILABILITY OF ABSTRACT <input checked="" type="checkbox"/> UNCLASSIFIED/UNLIMITED <input type="checkbox"/> SAME AS RPT <input type="checkbox"/> DTIC USERS			21 ABSTRACT SECURITY CLASSIFICATION UNCLASSIFIED		
22a NAME OF RESPONSIBLE INDIVIDUAL Dr. W.E. Moerner			22b TELEPHONE (Include Area Code) (408) 927-2426		22c OFFICE SYMBOL

90 05 23 006

OFFICE OF NAVAL RESEARCH

Contract N00014-84-C-0708

R&T Code 4131022

Technical Report No. 24

Intracavity Frequency Doubling of a Nd:YAG Laser with an
Organic Nonlinear Optical Crystal

by

Stephen Ducharme, W. P. Risk, W. E. Moerner,
Victor Y. Lee, R. J. Twieg, and G. C. Bjorklund

Prepared for Publication

in

Applied Physics Letters

IBM Research Division
Almaden Research Center
650 Harry Road
San Jose, California 95120-6099

March 13, 1990

Reproduction in whole, or in part, is permitted for any purpose of the United States Government.

This document has been approved for public release and sale; its distribution is unlimited.

**Intracavity frequency doubling of a Nd:YAG laser with an
organic nonlinear optical crystal**

Stephen Ducharme, W. P. Risk, W. E. Moerner,
Victor Y. Lee, R. J. Twieg, and G. C. Bjorklund

IBM Almaden Research Center
San Jose, California 95120-6099



(Received

ABSTRACT: We have demonstrated intracavity second harmonic generation of green 532 nm light in a quasi-cw 1064 nm Nd:YAG laser using organic nonlinear optical crystals of DAN (4-(N,N-dimethylamino)-3-acetamidonitrobenzene) immersed in index matching fluid contained in an antireflection-coated cuvette. This technique permits crystals to be used directly from solution growth without polishing or antireflection coating them. Up to 0.56 mW peak power of 532 nm light was generated from 2.3 W of intracavity 1064 nm peak power in 100 microsecond pulses. We also report preliminary results on true cw intracavity harmonic generation with antireflection coated DAN crystals.

For	
<input checked="checked" type="checkbox"/>	
<input type="checkbox"/>	
<input type="checkbox"/>	
ion	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	

with dimethylamine in dimethylsulfoxide (DMSO). The yellow DAN powder was then purified by repeated recrystallization from solution in a mixture of ethanol and water. Additional purification was performed by column chromatography on silica gel with a mixture of ethyl acetate and hexane followed by further recrystallizations from a mixture of methylene chloride and hexane. The purity of the DAN powder was confirmed by high pressure liquid chromatography.

Single crystals of DAN were grown from DMSO solution in a tube with excess feed material at the bottom.¹¹ Thermal convection within the tube was created by maintaining the temperature at the bottom of the tube at 29°C while the upper portion of the tube was held at 27°C. High quality crystals of up to 10x7x2 mm were obtained in 3 to 4 weeks. DAN belongs to the monoclinic space group $P2_1$ (point group 2)¹² and the crystals grown in solution have large (001) facets and are generally trapezoidal in shape with smaller (0 $\bar{1}$ 0) (011), (0 $\bar{1}$ 1) and (112) facets when taken directly from the growth solution. The crystals studied in this work ranged in thickness from 0.6 mm to 1.3 mm and in area from 4 mm² to 10 mm² and had smooth but moderately distorted (001) facets.

Loss due to the crystal surface reflections and roughness was reduced by immersing the as-grown crystals in index matching fluid so that crystals could be used as grown, without polishing or antireflection-coating the surface. The Cargille Series A Refractive Index Fluids (a mixture of hydrogenated terphenyl and 1-bromonaphthalene) were contained in a BK7 glass spectroscopic cuvette which was antireflection coated for 1064 nm on the entrance and exit faces (Fig. 1(a)). Total reflection loss from the two cuvette-fluid and two fluid-crystal interfaces was calculated to be 0.4 % for an optimum fluid index of $n = 1.597$ and less than 0.8 % for $1.5 < n < 1.7$ at 1064 nm. However, the refractive index fluid absorbed enough of the laser power to cause thermal blooming and convection and slowly dissolved the crystal as well. These effects worsened with higher index fluids, presumably due to the increasing concentration of the 1-bromonaphthalene component. The convection was effectively eliminated by placing a shutter in the cavity, as described below. Lower absorption and solvation might be obtained with another choice of index matching fluid.

Intracavity second harmonic generation (SHG) of the 1064 nm line of Nd:YAG was achieved by Type I phase-matching in DAN for a p-polarized fundamental beam travelling at approximately 22° from the normal to the (001) facet in a plane tilted by 2° from the (0 $\bar{1}$ 0) plane. The effective SHG coefficient d is 27 ± 3 pm/V and the output at 532 nm is polarized along the crystalline (010) axis.³ The phase-matched index of refraction⁵ is 1.732 ± 0.005 .

The end-pumped concentric Nd:YAG laser is depicted schematically in Figure 1(b). The TEM₀₀ output of a Ti:Sapphire laser pumped by a cw argon laser was focussed by a 60 mm focal length lens into the 6 mm Nd:YAG rod located near one end of the cavity. The output coupler and high reflector were coated for 99.9 % and 100.0 % reflection, respectively, and the YAG laser rod was antireflection coated for 1064 nm. The high reflector was coated for maximum transmission at the pump wavelength of 810 nm. Both the high reflector and the output coupler had radii of curvature of 75 mm and were separated by approximately 150 mm, resulting in a near-concentric resonator configuration. The output coupler transmitted 0.1% of the incident 1064 nm laser power and 88.4 % of the incident 532 nm harmonic. The dichroic mirror and interference filters (not shown in Fig. 1(b)) separated the fundamental and harmonic outputs into separate silicon photodiode detectors whose outputs were recorded on a digital oscilloscope.

First the laser was aligned for maximum TEM₀₀ mode output to yield approximately 2-5 W of cw intracavity power at 0.5 W of pump power, without the cuvette or crystal. Then the 1 cm path length cuvette (see Fig. 1(a)) containing the index matching fluid (but not the crystal) was inserted into the cavity with the antireflection coated entrance and exit faces perpendicular to the cavity axis. The laser was realigned and, when operated cw, exhibited strong power fluctuations and poor transverse mode quality. The fluctuations were due primarily to convection in the refractive index fluid which in turn was caused by heating of the fluid by residual absorption of the laser and pump light. (All of the index fluids used absorbed less than 1 % at 1064 nm.) To reduce fluctuations caused by heating, a shutter was inserted between the laser rod and the cuvette (see Fig. 1(b)) and opened for 10 msec at a repetition rate of 1 to 5 Hz. The low average power (0.2-1 % of the peak power) eliminated fluctuations from induced convection, but the laser output was essentially

quenched after about 100 μ sec by thermal blooming. Because of this, multiple pulses would often arise within the 10 msec shutter window and the laser could also be adjusted to yield gain-switched spikes of duration less than the 20 μ sec rise time of the detector. The most stable output was obtained with a single 100 μ sec wide pulse and a near TEM₀₀ spatial mode, with a peak height fluctuating between 60 - 30 % of the empty cavity cw power, indicating that the cuvette and fluid introduced moderate linear loss.

The DAN crystal was mounted on a 6-axis stage (3 translation and 3 rotation axes) and suspended in the index-matching fluid located in the cavity of the Nd:YAG laser. The laser cavity was realigned while the crystal orientation and position were adjusted to maximize both the fundamental laser output and the harmonic output. The crystal introduced a small amount of astigmatism and distortion into the resonator, which was clearly apparent in the shape of the output beam, as well as additional linear loss, but did not noticeably increase the thermal blooming. The peak laser output fluctuated between 15 % and 60 % of the empty cavity cw power. Figure 2 shows the time-dependence of the fundamental (lower curve) and harmonic (upper curve) outputs from the laser. Note that the second peak in the SHG output is much smaller, relative to the first peak, than the second peak in the fundamental because of the quadratic dependence of the SHG on the fundamental power.

The highest SHG output was obtained with a 0.77 mm thick crystal immersed in $n = 1.624$ index fluid. With a peak intracavity Nd:YAG power (in short spikes of duration less than 10 μ sec.) of 2.3 W, the peak SHG power exiting one crystal face was 0.28 mW, or 0.012 % power conversion efficiency. (The crystal emits the same power from the other crystal face, but this light was not collected.) The expected SHG output power from Boyd and Kleinman¹³ (in SI units) is $P_{2\omega} = (2\pi n L h / \lambda) (8\pi^2 d^2 / \epsilon_0 c \lambda^2 n^3) \exp(-\alpha' L) (P_\omega)^2$. Here, P_ω is the fundamental power, $\lambda = 1064$ nm, $n = 1.732$ is the crystal index of refraction, L is the distance traversed by the beams in the crystal, ϵ_0 is the permittivity of free space, c is the speed of light, $\alpha' \approx (1/2)\alpha_{2\omega} \approx 2.5\text{cm}^{-1}$ and w_0 is the Gaussian beam waist radius. In the limit of weak focussing ($L \ll 2\pi n w_0^2 / \lambda$), but significant beam walkoff ($\rho L / w_0 \geq 1$), $2\pi n L h / \lambda \approx L^2 A(L) / \pi w_0^2$ where ρ is the beam walkoff angle due to double refraction (for DAN,

the walk-off angle is 10.8° ⁵. The value of $A(L)$ is a slowly decreasing function of $\rho L/w_0$ and is equal to 1 in the absence of beam walk off. Therefore $P_{2\omega} = S(P_\omega)^2$ where ¹³

$$S = \left(\frac{8\pi^2 d^2}{\epsilon_0 c \lambda^2 n^3} \right) \left(\frac{L^2 A(L)}{\pi w_0^2} \right) \exp(-\alpha' L)$$

$$= 3.7 \times 10^{-6} (W/W^2) \times \left(\frac{L^2 A(L)}{\pi w_0^2} \right) \exp(-\alpha' L) \quad (1)$$

The Gaussian beam waist in the crystal $w_0 = 70 \mu\text{m}$ was determined by Gaussian mode resonator calculations (including the effect of the YAG rod) and direct measurement of the YAG output spot radius with a linear photodiode array. For a 0.77 mm thick crystal at the phase-matching angle $A(L) = 0.59$ and the calculated SHG power is 0.43 mW which is in good agreement with the observed value (0.28 mW).

Figure 3 shows the SHG power exiting the crystal versus the intracavity fundamental power for a 1.3 mm thick crystal in $n = 1.589$ index fluid. The pump power was constant at 0.5 W but the laser output fluctuated from pulse to pulse and each point represents the peak SHG and intracavity powers from a single pulse. The laser output was a slightly distorted and astigmatic Gaussian TEM₀₀ mode which also fluctuated from shot to shot. We attribute the majority of the scatter in Figure 3 to the mode quality fluctuation which results in a fluctuation of the peak intensity of the fundamental wave at the crystal. The solid line is a least-squares fit to $P_{2\omega} = S(P_\omega)^2$ with $S = 8 \times 10^{-5} \text{W/W}^2$. The calculated value of S using equation 1 (here $A(L) = 0.43$) is $S = 14 \times 10^{-5} \text{W/W}^2$ which is in excellent agreement with the measured value.

This is the first report, to our knowledge, of intracavity harmonic generation by an organic nonlinear optical crystal. A novel technique of immersing the crystal in index matching fluid has been used which is a useful way to evaluate a new material and or to aid in optimization of the growth technique. Crystals with only fair surface quality, that is with nonplanar and moderately rough surfaces, can be inserted in the cavity without polishing or antireflection coating. We have shown that the refractive index of the fluid is not overly constrained (1.50

$n < 1.70$ at 1064 nm should be suitable for DAN) but reduced absorption at the fundamental wavelength and chemical compatibility with the crystal are very important. It is likely that, with proper choice of fluid and cuvette size, stable cw intracavity SHG is possible. Harmonic conversion efficiencies up to 0.01 % of the quasi-cw intracavity power has been achieved using this technique.

We have also very recently demonstrated true cw intracavity harmonic generation using a crystal which has been polished on the (001) faces and subsequently coated for low reflection loss (0.5 % per face) in air (without the cuvette and index-matching fluid). 4 μ W cw power (from each crystal face) of 532 nm light was generated from 137 mW of intracavity power in a 0.6 mm thick crystal in the Nd:YAG laser described above. The output power calculated using equation (1) is 1.3 μ W assuming a beam waist radius $w_0 = 70 \mu\text{m}$ as noted above. Work to improve the quality of the crystal surface and coating is continuing in order to permit higher intracavity power and hence higher cw SHG conversion efficiency.

Successful laser operation and harmonic generation with an organic NLO crystal in the laser cavity is an important and crucial step in the quest for efficient generation of short wavelength laser light with compact laser diode sources. With its large phase-matched figure of merit and the internal quality attained thus far, DAN is beginning to fulfill some of the early predictions of its suitability for this purpose. Because of the absorption edge at approximately 500 nm, DAN will probably work best with the longer wavelength diodes. Resonance enhancement partially compensates for absorption producing efficient SHG for pump wavelengths as short as 970 nm where the absorption at the second harmonic wavelength is approximately 80 cm^{-1} but the second harmonic coefficient is more than twice as large as at 1064 nm.¹⁴

ACKNOWLEDGEMENTS

We thank Herbert Looser for assistance and advice concerning the solution growth of the DAN crystals and W. J. Kozlovsky for useful discussions concerning the operation of the Nd:YAG laser. This work was supported in part by the U.S. Office of Naval Research.

REFERENCES

1. W. P. Risk and W. Lenth, in *Growth, Characterization, and Application of Laser Host and Nonlinear Crystals*, J. T. Lin, editor, Proc. Soc. Photo-Opt. Instrum. Engr. 1104, 13 (1989); Appl. Phys. Lett. 52, 85 (1988).
2. R. J. Twieg and K. Jain, in *Nonlinear Optical Properties of Organic and Polymeric Materials*, D. J. Williams, editor, ACS Symp. Series No. 233 (American Chemical Society, Washington, D. C., 1983), pp. 57-80; R. J. Twieg and C. W. Dirk, IBM Research Report RJ-5329, (1986).
3. J.-C. Baumert, R. J. Twieg, G. C. Bjorklund, J. A. Logan, and C. W. Dirk, Appl. Phys. Lett. 51, 1484 (1987).
4. P. A. Norman, D. Bloor, J. S. Obhi, S. A. Karaulov, M. B. Hursthouse, P. V. Kolinsky, R. J. Jones, and S. R. Hall, J. Opt. Soc. Am. B 4, 1013 (1987).
5. P. Kerkoc, M. Zgonik, K. Sutter, Ch. Bosshard, and P. Günter, Appl. Phys. Lett. 54, 2062 (1989).
6. J. D. Bierlein, L. K. Cheng, Y. Wang, and W. Tam, Appl. Phys. Lett. 56, 423 (1990).
7. J. N. Sherwood, in *Organic Materials for Nonlinear Optics*, D. Bloor and R. A. Han, eds., (Royal Society of Chemistry, London, 1989), p. 71.
8. Y. Kubota and T. Yoshimura, Appl. Phys. Lett. 53, 2579 (1988).
9. W. R. Donaldson and C. L. Tang, Appl. Phys. Lett. 44, 25 (1984); G. C. Catella, J. H. Bohn, and J. R. Luken, IEEE J. Quantum Electron. 24, 1201 (1988).
10. I. Ledoux, J. Zyss, A. Migus, J. Etchepare, G. Grillon, and A. Antonetti, Appl. Phys. Lett. 48, 1564 (1986).
11. H. Arend, R. Perret, H. Wuest, and P. Kerkoc, J. Cryst. Growth 74,321 (1986).
12. T. C. Huang, R. Karimi, J.-C. Baumert, and G. C. Bjorklund, Powder Diffraction 3, 78 (1988).
13. G. D. Boyd and D. A. Kleinman, J. Appl. Phys. 39, 3597 (1968).
14. H. Looser, W. P. Risk, R. J. Twieg, G. C. Bjorklund, in *Technical Digest, Quantum Electronics and Laser Science Conference* (Optical Society of America, Washington, DC, 1989), p. 22.

FIGURE CAPTIONS

Fig. 1. a) Diagram of the spectroscopic cuvette containing refractive index fluid and the crystal oriented at the phase-matching angle α . Both the entrance and exit faces of the cuvette are antireflection coated for 100 % transmission at 1064 nm. b) Diagram of the end-pumped Nd:YAG laser showing the locations of the high reflector, output coupler, pump focussing lens and the cuvette containing the DAN crystal. The dichroic mirror reflected the 1064 nm laser output into one detector and transmitted the 532 nm harmonic to the other detector. (Both detectors were preceded by an appropriate interference filter, not shown, to block unwanted light.)

Fig. 2. Fundamental (lower curve) and second harmonic (upper curve) outputs from the laser. The amplitude of the initial peak of each trace was used to determine the SHG efficiency. The second smaller peak was not always present.

Fig. 3. The peak SHG power versus the peak fundamental intracavity power in a 1.3 mm thick crystal. The line is a least squares fit to the relationship $P_{2\omega} = S(P_{\omega})^2$ with $S = 8 \times 10^{-5} \text{ W/W}^2$.

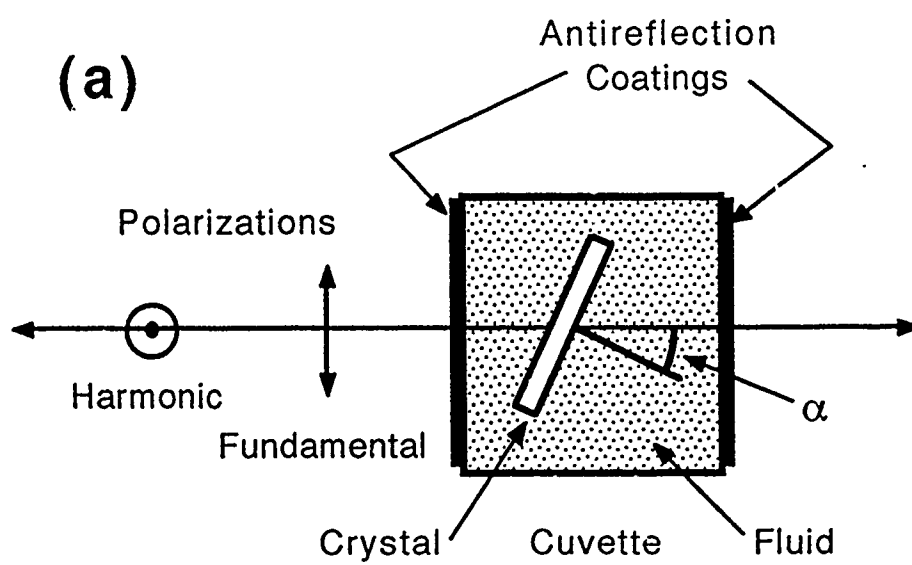


Fig. 1(a)

(b)

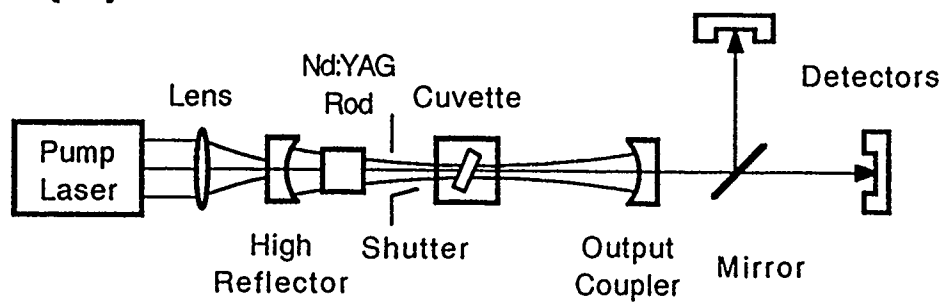


Fig. 1(b)

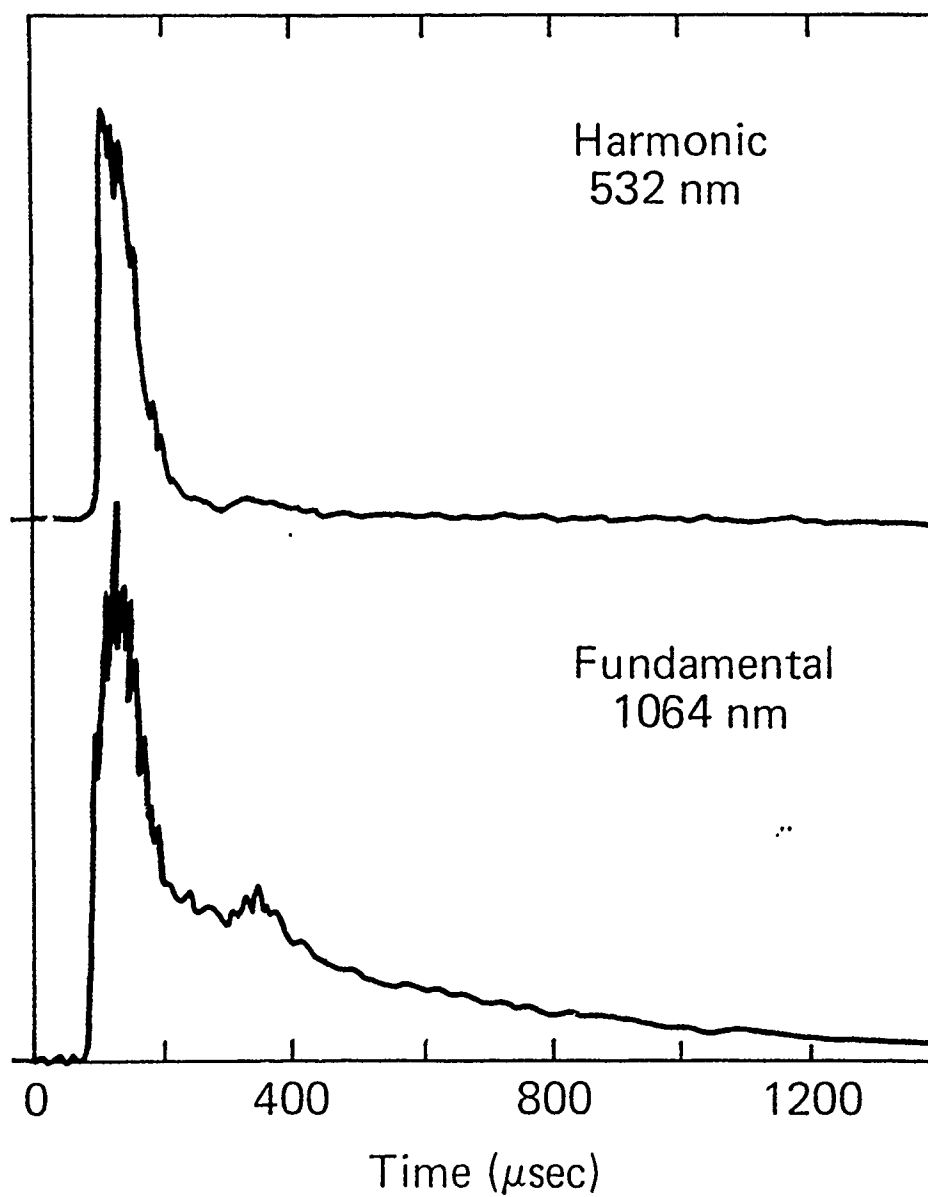


Fig. 2

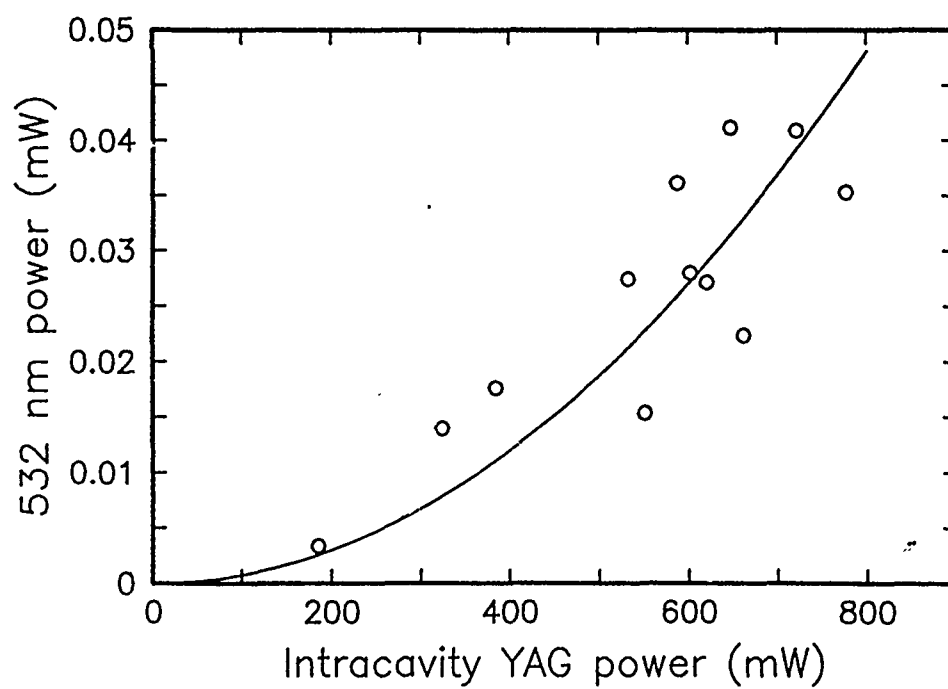


Fig. 3

TECHNICAL REPORT DISTRIBUTION LIST - GENERAL

Office of Naval Research (2)
Chemistry Division, Code 1113
800 North Quincy Street
Arlington, Virginia 22217-5000

Commanding Officer (1)
Naval Weapons Support Center
Dr. Bernard E. Douda
Crane, Indiana 47522-5050

Dr. Richard W. Drisko (1)
Naval Civil Engineering
Laboratory
Code L52
Port Hueneme, CA 93043

David Taylor Research Center (1)
Dr. Eugene C. Fischer
Annapolis, MD 21402-5067

Dr. James S. Murday (1)
Chemistry Division, Code 6100
Naval Research Laboratory
Washington, D.C. 20375-5000

Dr. Robert Green, Director (1)
Chemistry Division, Code 385
Naval Weapons Center
China Lake, CA 93555-6001

Chief of Naval Research (1)
Special Assistant for Marine
Corps Matters
Code 00MC
800 North Quincy Street
Arlington, VA 22217-5000

Dr. Bernadette Eichinger (1)
Naval Ship Systems Engineering
Station
Code 053
Philadelphia Naval Base
Philadelphia, PA 19112

Dr. Sachio Yamamoto (1)
Naval Ocean Systems Center
Code 52
San Diego, CA 92152-5000

Dr. Harold H. Singerman (1)
David Taylor Research Center
Code 283
Annapolis, MD 21402-5067

ENCLOSURE(2)